

HEAVY DUTY SLIDE GATE OPERATORS

Model HSLG

HSLG COMMERCIAL/ INDUSTRIAL

- Double V-belt to chain reduction
- #40 roller chain
- 1/2, 3/4, or 1 HP motor
- All voltages, single or three-phase
- Powder coat finish
- Post mount standard;
pad mount optional

Linear[®]
Building On Innovation.



All Models ETL Listed;
UL325 Compliant



Supporters and Proud Members of



ELECTRICAL

- Integral entrapment sensing system with dual multi-turn precision potentiometers for accurate adjustment and enhanced safety
- Continuous-tone entrapment alarm with reset button
- Integrated warning beeper during gate movement
- 15 diagnostic LEDs on board for ease of setup and troubleshooting
- Selectable pre-start alarm with provision for ADA compliant visual pre-start and run alarm
- AC and DC power available for access control accessories
- Solenoid disc brake
- Duplex receptacle on 115 VAC units
- Built-in master/slave capability using 3-wire shielded cable



- 1 Belt and Chain Reduction**
Rugged and efficient double, 4L V-belt to chain reduction
- 2 Solid-State Control Circuitry**
 - UL325/UL991 compliant 24 VDC control board
 - Full featured for access control, security, and entrapment protection
- 3 Manual Disconnect**
 - Secure, easy, manual operation during power failure or emergency
 - Optional remote cable kit for outside-the-gate access

- 4 Heavy-Duty Components**
Adjustable torque limiter and heavy-duty pillow block bearings for smooth, reliable, quiet power transmission
- 5 Standard Convenience Features**
 - Exterior stop/reset button
 - Power on/off button
 - 3-button station
- 6 Weather-Resistant Cabinet**
 - Galvannealed steel cabinet with powder coat finish
 - Lockable, gasketed, hinged, and removable front cover

HSLG SERIES SLIDE GATE OPERATOR SPECIFICATIONS

Model	HP	Voltage-Single Phase (Voltage-Three Phase)	Drive Type	Maximum Gate Length	Maximum Gate Weight	Gate Speed	Maximum Cycles
HSLG	HSLG-2	1/2	115/208/230 V (208/230/460 V)	#40 roller chain	35'	1000 lbs	10"/sec continuous duty
	HSLG-4	3/4	115/208/230 V (208/230/460 V)	#40 roller chain	45'	1200 lbs	10"/sec continuous duty
	HSLG-1	1	115/208/230 V (208/230/460 V)	#40 roller chain	55'	1700 lbs	10"/sec continuous duty

MECHANICAL


- Heavy-duty steel chassis
- Easy-to-operate emergency manual disconnect handle
- Adjustable torque limiter
- #40 roller chain and sprockets
- Efficient double V-belt drive

CAUTIONS



- Automatic gates not for pedestrians
- Automatic gate operators designed for vehicular traffic only; operators are powerful and can cause serious injury or death; **DIRECT ALL PEDESTRIAN TRAFFIC TO SEPARATE PEDESTRIAN GATE**
- UL325 requires use of contact or non-contact anti-entrapment devices
- ASTM F2200 requires that all exposed rollers are covered

Dimensions

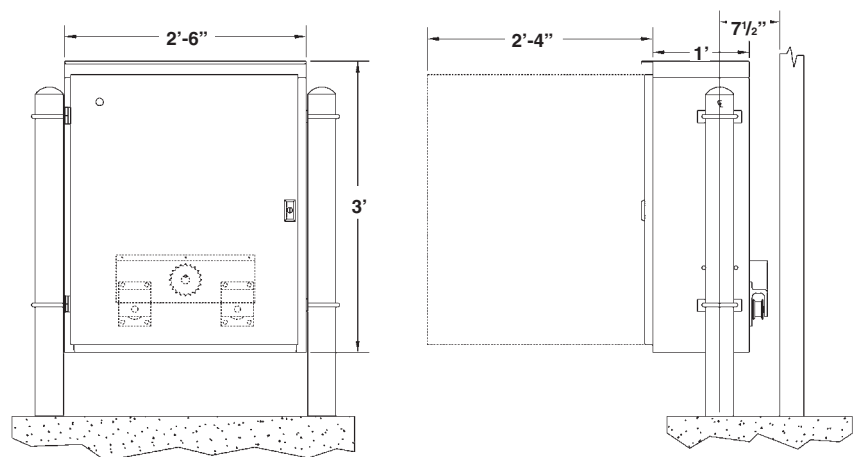

Linear[®]
Building On Innovation.

(800) 421-1587 • www.linearcorp.com